



DESCRIPTION

The IX-DVF-L is a flush mount, weather resistant, IP video door station, with a built-in circuit that supports T-coil compatible hearing aids. It connects to a network using Cat-5e/6 cable and is SIP compliant. The IX-DVF-L is equipped with a 1.23 megapixel fixed color camera. The camera angle can be vertically adjusted using a lever on the back of the station. The video can be streamed to third-party devices using ONVIF® Profile S or RTSP. Audio and video can be captured on a microSD™ card. The IX-DVF-L can be programmed to call up to 20 stations. There are three call level selections. The IX-DVF-L has a 600Ω output that can be used for paging or communication.

There are two contact outputs that can be programmed to trigger during door release, when the 600Ω output is used, or based on the status of the station. There are six inputs that can be used to trigger an outgoing call or answer a call/page. Sound files can be uploaded for custom messages to be played during certain functions (door release, call placed, communication start, error message). The stations have audible and visual indications for calling, communication, and door release.


FEATURES

- T-coil hearing aid support (requires 24V DC)
- SIP compliant
- 1.23 megapixel fixed color video camera
- White LED for low light illumination
- ONVIF® Profile S compliant
- Camera vertical adjustment +15°, 0° or -8° (manual)
- Slot for microSD™ card (not provided by Aiphone)
- Weather and vandal resistant
- 2 contact outputs/6 trigger inputs
- Stainless steel
- 802.3af PoE compliant
- RJ45 in/out with PoE pass-through (802.3at Type 2 PoE+)

IX-DVF-L

IP Video Door Station with T-Coil Compatibility for the IX Series

FEATURE CALL-OUT

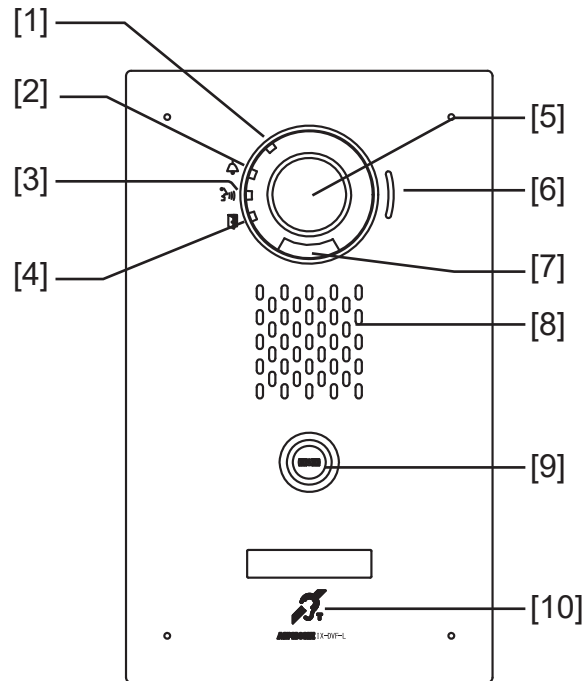

FEATURE CALL-OUT DEFINITIONS

[1] Status indicator (orange/blue)

[2] Call indicator (green)

[3] Communication indicator (orange)

[4] Door release indicator (green)

[5] Camera

[6] Microphone

[7] Low light LED

[8] Speaker

[9] Call button

[10] T-coil symbol

SPECIFICATIONS

Power Source: PoE (IEEE 802.3af class 0) and 24V DC (PS-2420UL)
T-coil: 24V DC (PS-2420UL)

Power Draw: 5.28W

Camera: 1/3" CMOS 1.23 megapixel

Min. illumination: 5 lux

Audio Codec: G.711 (μ -law, A law), G.722

Video Codec: H.264/AVC, motion JPEG

Protocols: IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS

Port Security: IEEE 802.1X

Operating Temp: -40° ~ 140°F (-40° ~ 60°C)

Protection: IP65, IK08

Dimensions: IX-DV 11-11/16" H x 7" W x 2-1/16" D