



DESCRIPTION

The IX-SS-2G is a 2-gang audio flush mount IP door station. It is weather resistant (IP65) and connects to a network using Cat-5e/6 cable. It is SIP compliant and can be used with or without other IX Series stations. The station can be programmed to call up to 20 different stations and there are three different call levels to choose from. Sound files can be uploaded allowing for custom messages to be played during certain functions (door release, call placed, communication start, error message, etc.). The station has audible and visual indications for calling, communication, and door release.


FEATURES

- SIP compliant
- Illuminated call button indicator
- Weather and vandal resistant (IP65, IK10)
- One contact output
- One trigger input
- Stainless steel
- 802.3af PoE compliant
- One PoE LAN port

IX-SS-2G

IP 2-Gang Audio Door Station for the IX Series

FEATURE CALL-OUT

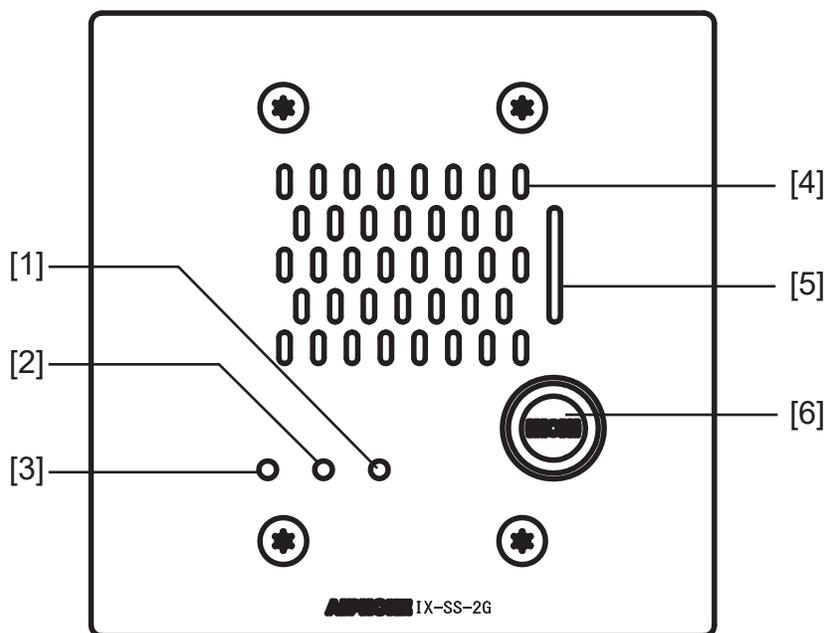

FEATURE CALL-OUT DEFINITIONS

- [1] Status indicator (orange/blue)
- [2] Communication indicator (orange)
- [3] Call indicator (green)
- [4] Speaker
- [5] Microphone
- [6] Call button

SPECIFICATIONS

- Power Source: PoE (IEEE 802.3af class 0)
- Power Draw: 3.36 Watts
- Audio Codec: G.711 (μ -law, A law), G.722
- Protocols: IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS
- Port Security: IEEE 802.1X
- UL Listed: UL 62368-1
cUL 62368-1
- Operating Temp: $-40^{\circ} \sim 140^{\circ}\text{F}$ ($-40^{\circ} \sim 60^{\circ}\text{C}$)
- Ingress Protection: IP65
- Impact Protection: IK10
- Dimensions: $4\text{-}\frac{3}{4}\text{"}$ H x $4\text{-}\frac{3}{4}\text{"}$ W